K Series

RHD OPTION

Definition:

★ K series refers to the models with 1580mm(K3),1680mm(K6) width cabin.


Features and advantage:

★ Upgraded and improved on the classic 100P cabin design.

★ Significant cost advantage with stable quality.

★ Same chassis design as M1 series.



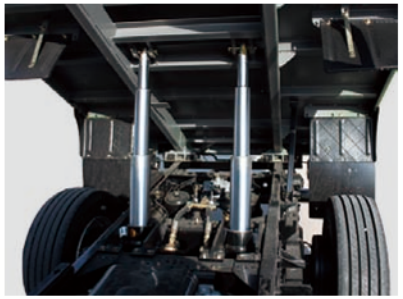





K SERIES					
Fuel type	DIESEL TYPE	DIESEL TYPE	DIESEL TYPE	DIESEL TYPE	GASOLINE TYPE
Model	GK36E	K66A	K67B	K68B	K69B
Emission	Euro-V	Euro-I	Euro-III	Euro-II	Euro-II
Suggested payload	2.5T	2T	2.5T	2.5T	4T
Cabin	single cabin (1580)	single cabin (1680)	single cabin (1680)	one and half cabin (1680)	single cabin (1680)
Wheel Base (mm)	**2600**	**2800**	**2800**	**2600**	**2800**
Front/rear overhang(mm)	1100/1315	1125/1495	1125/1495	1125/1370	1125/1495
Overall dimensions (mm)	5015*1900*2300	5420*1900*2300	5420*1900*2300	5095*1900*2300	5420*1900*2320
Cargo Box Size (mm)	3180*1800*400	3600*1800*390	3600*1800*390	2880*1800*390	3600*1800*390
Curb Weight (Kg)	2660	2280	2280	2260	2320
G.V.W	5160	4280	4780	4760	6320
Max.Speed (Km/h)	90	90	95	95	95
Tyre model	6.00R15LT	6.50R16LT	6.50R16LT	6.50R16LT	7.50R16LT
Wheeltrack(Front/Rear)	1385/1395	1500/1505	1500/1505	1475/1500	1520/1560
Final ratio	5.125	6.167	6.167	5.833	6.167
QTY of wheels	6+1	6+1	6+1	6+1	6+1
Brake system	Hydraulic brake	Hydraulic brake	Hydraulic brake	Hydraulic brake	Air brake
Parking brake	Central drum type	Central drum type	Central drum type	Central drum type	Spring energy ari cut brake
Gearshift	5+1 speed,manually	5+1 speed,manually	5+1 speed,manually	5+1 speed,manually	6+1 speed,manually
Battery volt	24V	12V	12V	12V	24V
ENGINE POWER					
Engine Model	D19TCIE1(YUNNEI)	JE493Q1(ISUZU)	JE493ZLQ3A(ISUZU)	YN490QZL(YUNNEI)	YC4FA120-33(YUCHAI)
Displacement (cc)	1910	2771	2771	2672	2982
Power (KW)/Rpm	75/3600	57/3600	75/3600	60/3200	88/3200
Torque (N.m)/Rpm	250/1600-2600	172/2000	240/2000	206/2000-2200	345/1800-2200
CONFIGURATIONS					
ABS	◎	◎	◎	◎	●
Power steering	●	●	●	●	●
Media	MP3	MP3	MP5	MP5	MP5
A/C	●	●	●	●	●
Power window	●	●	●	●	●
Central lock	●	●	●	●	●